



+255 22 2135834

info@plvdigital.co.tz




Specification:

- Instant for hot water or cold water, no wait, no waste.
- Patent heating technology, much longer service life.
- Constant outlet hot water temperature according to the demand.
- Touch screen for operation, automatic thermostat, auto memory function avoid repeated operation.
- LED digital display, the outlet temperature is clear at glance.
- Overheat protection & dry heating protection.
- Easy Installation, power cord can be connected above or under the table board.
- Nozzle is rotatable in 180° , convenient to use.
- Fault auto-detection technique, error code will appear automatically while failure.



Safety Features:

- Leakage Protection
- Overheat Protection
- Dry heating protection
- **Child Lock protection**
- Water & Electricity isolation protection

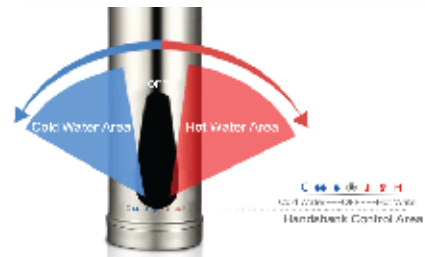

Technology Data:

Model	TA33H
Phase	1
Voltage	230V
Power	3.3kW
Rated Current	14.3A
Required Circuit breaker/Plug	16A
Operation Mode	Hand Shank & Touch Screen
Temp. Setting Range	30° C -50° C
Overheat Protection	55° C
Thermal Cut-out (Auto Reset)	65° C
Thermal Cut-out (Manual Reset)	90° C
Min. Water flow to activate	1.5L/min.
Rated Pressure	0MPa
Water Pressure	0.02-0.6MPa
Water Connections	G1/2"

